



FEATURES :

- * 65NM/65NM(P) : 6x30mm Ceramic Tube, Fast-Acting Type
- * 65TS/65TS(P) : 6x30mm Ceramic Tube, Medium Time Lag Type
- * RoHS-Compliant Products


APPROVALS :

- | | |
|---|--|
| <p>65NM/65NM(P)</p> <ul style="list-style-type: none"> * UL / cUL [500mA-15A 125V/250V] * UR / cUR [20A-30A 125V/250V] * METI (PSE) [1A-30A 125V/250V]†† * KC [300mA-10A 250V] | <p>65TS/65TS(P)</p> <ul style="list-style-type: none"> * UL / cUL [500mA-15A 125V/250V] * UR / cUR [20A-25A/30A 125V/250V]† * METI (PSE) [1A-30A 125V/250V]†† * KC [500mA-30A 250V] * TÜV [3A-6A/7A-30A 125V/250V] |
|---|--|




65NM, 65TS SERIES

DIMENSIONS :

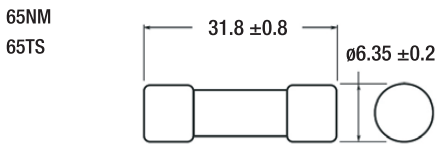

65NM(P)
65TS(P)

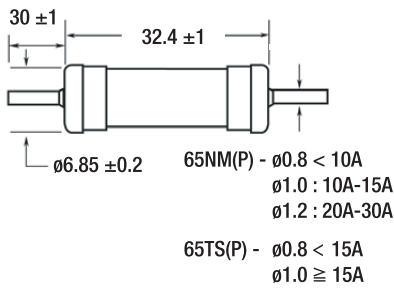


Unit : mm

ELECTRICAL CHARACTERISTICS :

% of Ampere Rating	Opening Time
100%	4 hours Min.
135%	1 hour Max.
200%	120 sec Max.

AVERAGE TIME CURRENT CURVES :

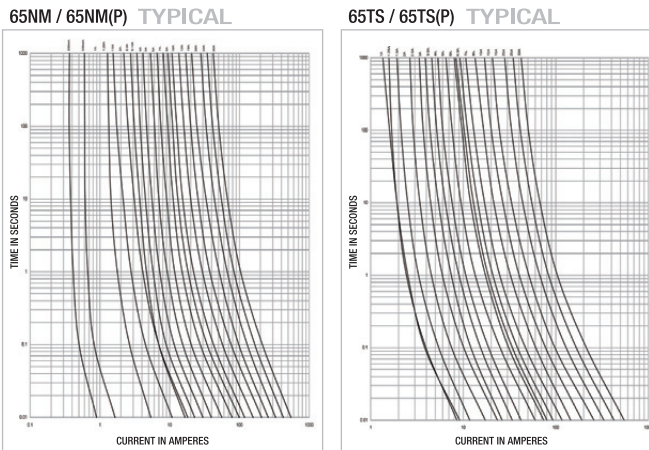

SPECIFICATIONS :

Product Code 65NM / 65NM(P)	Product Code 65TS / 65TS(P)	Ampere Rating	Voltage Rating H / L	Product Code 65NM / 65NM(P)	Product Code 65TS / 65TS(P)	Ampere Rating	Voltage Rating H / L
65NM / 65NM(P) 0300H/L		300 mA	250V / 125V	65NM / 65NM(P) 032H/L	65TS / 65TS(P) 032H/L	3.15 A	250V / 125V
65NM / 65NM(P) 0500H/L	65TS / 65TS(P) 0500H/L	500 mA	250V / 125V	65NM / 65NM(P) 035H/L	65TS / 65TS(P) 035H/L	3.5 A	250V / 125V
65NM / 65NM(P) 0600H/L	65TS / 65TS(P) 0600H/L	600 mA	250V / 125V	65NM / 65NM(P) 040H/L	65TS / 65TS(P) 040H/L	4 A	250V / 125V
65NM / 65NM(P) 0630H/L	65TS / 65TS(P) 0630H/L	630 mA	250V / 125V	65NM / 65NM(P) 050H/L	65TS / 65TS(P) 050H/L	5 A	250V / 125V
65NM / 65NM(P) 0700H/L	65TS / 65TS(P) 0700H/L	700 mA	250V / 125V	65NM / 65NM(P) 060H/L	65TS / 65TS(P) 060H/L	6 A	250V / 125V
65NM / 65NM(P) 0750H/L	65TS / 65TS(P) 0750H/L	750 mA	250V / 125V	65NM / 65NM(P) 063H/L	65TS / 65TS(P) 063H/L	6.3 A	250V / 125V
65NM / 65NM(P) 0800H/L	65TS / 65TS(P) 0800H/L	800 mA	250V / 125V	65NM / 65NM(P) 070H/L	65TS / 65TS(P) 070H/L	7 A	250V / 125V
65NM / 65NM(P) 010H/L	65TS / 65TS(P) 010H/L	1 A	250V / 125V	65NM / 65NM(P) 080H/L	65TS / 65TS(P) 080H/L	8 A	250V / 125V
65NM / 65NM(P) 012H/L	65TS / 65TS(P) 012H/L	1.2 A	250V / 125V	65NM / 65NM(P) 090H/L	65TS / 65TS(P) 090H/L	9 A	250V / 125V
65NM / 65NM(P) 013H/L	65TS / 65TS(P) 013H/L	1.25 A	250V / 125V	65NM / 65NM(P) 100H/L	65TS / 65TS(P) 100H/L	10 A	250V / 125V
65NM / 65NM(P) 015H/L	65TS / 65TS(P) 015H/L	1.5 A	250V / 125V	65NM / 65NM(P) 120H/L	65TS / 65TS(P) 120H/L	12 A	250V / 125V
65NM / 65NM(P) 016H/L	65TS / 65TS(P) 016H/L	1.6 A	250V / 125V	65NM / 65NM(P) 150H/L	65TS / 65TS(P) 150H/L	15 A	250V / 125V
65NM / 65NM(P) 020H/L	65TS / 65TS(P) 020H/L	2 A	250V / 125V	65NM / 65NM(P) 200H/L	65TS / 65TS(P) 200H/L	20 A	250V / 125V
65NM / 65NM(P) 025H/L	65TS / 65TS(P) 025H/L	2.5 A	250V / 125V	65NM / 65NM(P) 250H/L	65TS / 65TS(P) 250H/L	25 A	250V / 125V
65NM / 65NM(P) 030H/L	65TS / 65TS(P) 030H/L	3 A	250V / 125V	65NM / 65NM(P) 300H/L	65TS / 65TS(P) 300H/L	30 A	250V / 125V

* Voltage Rating : H - 250VAC / L - 125VAC

* Contact Pico for Breaking Capacity under TUV

* Interrupting Rating :

- 65NM / 65NM(P) - 10,000A 125VAC (500mA-15A)
- 35A 250VAC (500mA-1A)
- 100A 250VAC (1.2A-3.5A/20A-30A)
- 200A 250VAC (4A-10A)
- 750A 250VAC (12A-15A)
- 100A 125VAC (20A-30A)

- 65TS / 65TS(P) - 10,000A 125VAC (500mA-15A)
- 35A 250VAC (500mA-1A)
- 100A 250VAC (1.2A-3.5A/20A-25A/30A)†
- 200A 250VAC (4A-10A)
- 750A 250VAC (12A-15A)
- 400A 125VAC (20A-25A/30A)†

† UL Recognized:
65TS 20A-25A
65TS(P) 20A-30A

†† METI (PSE):
20A - 30A (250VAC)