

# S-SBR10100

Schottky Barrier Rectifiers

Reverse Voltage 100V Forward Current10A

## FEATURES

- \* Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- \* Low power loss,high efficiency
- \* For use in low voltage high frequency inverters, free wheeling, and polarity protection applications
- \* Guardring for over voltage protection
- \* High temperature soldering guaranteed: 260°C/10 seconds at terminals
- \* S- Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q101 Qualified and PPAP Capable.

## Mechanical Data


Case: JEDEC TO-277A,  
molded plastic over SKY body

Terminals: Plated leads, solderable per  
MIL-STD-750, Method 2026

Mounting Position: Any

Weight: 0.095 g

Handling precaution:None

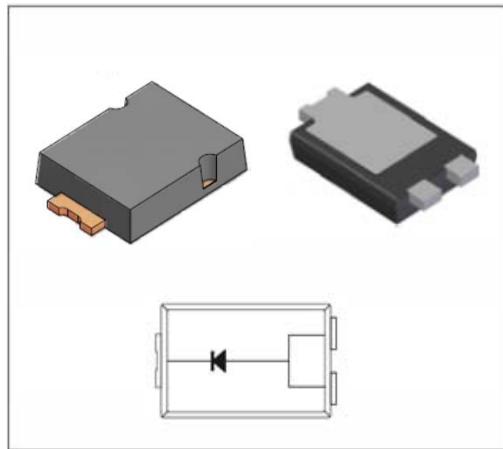

We declare that the material of product is  
Haloggen free (green epoxy compound)

## 1.Electrical Characteristic

### Maximum & Thermal Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

Parameter Symbol	symbol	S-SBR10100	Unit
device marking code		SBR10100	
Maximum repetitive peak reverse voltage	V <sub>RRM</sub>	100	V
Maximum RMS voltage	V <sub>RMS</sub>	70	V
Maximum DC blocking voltage	V <sub>DC</sub>	100	V
Maximum average forward rectified current at T <sub>c</sub> = 75°C	I <sub>F(AV)</sub>	10.0	A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I <sub>FSM</sub>	250	A
Typical thermal resistance (Note 1)	R <sub>θJL</sub> R <sub>θJC</sub> R <sub>θJA</sub>	3 8 80	°C/W
Typical thermal resistance (Note 3)	R <sub>θJA</sub>	135	°C/W
Operating junction temperature range	T <sub>J</sub>	-55 to +150	°C
Storage temperature range	T <sub>STG</sub>	-55 to +150	°C

### Electrical Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

Parameter Symbol	symbol	S-SBR10100-AT	Unit
Maximum instantaneous forward voltage at 10A at 25°C	V <sub>F</sub>	0.85	V
Maximum DC reverse current T <sub>j</sub> = 25°C at rated DC blocking voltage T <sub>j</sub> = 100°C(note2)	I <sub>R</sub>	1.0 1000	uA
Typical junction capacitance at 4.0V, 1MHz	C <sub>J</sub>	200	PF

#### NOTES:

1. Polymide PCB, 2oz. Copper. Cathode pad dimensions 18.8mm x 14.4mm. Anode pad dimensions 5.6mm x 14.4mm.

2. Short duration pulse test used to minimize self-heating effect .

3.FR-4 PCB, 2oz.Copper.

# S-SBR10100

## 2.Ratings and Characteristic Curves ( TA = 25°C unless otherwise noted )

Fig. 1 - Forward Current Derating

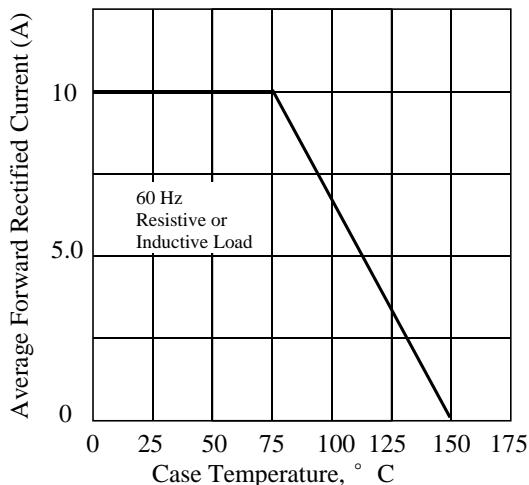


Fig. 2 - Maximum Non-repetitive Peak Forward Surge Current

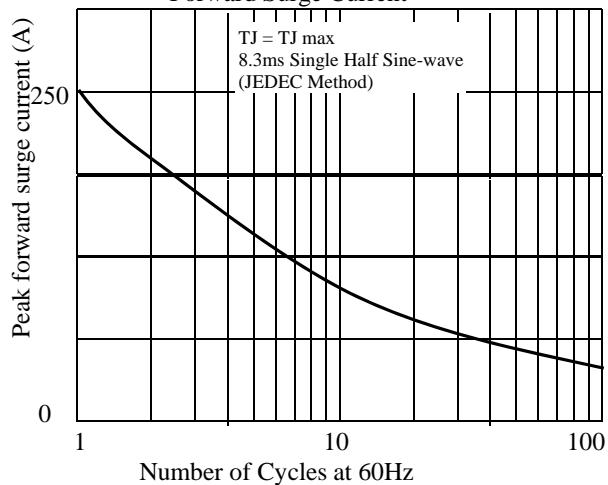


Fig. 3. - Typical Instantaneous Forward Characteristics

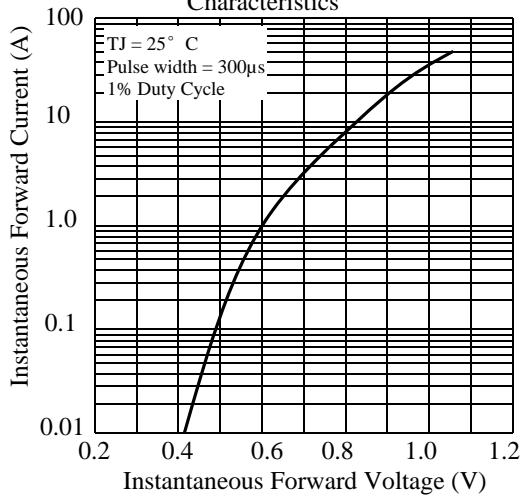


Fig. 4. - Typical Reverse Characteristics

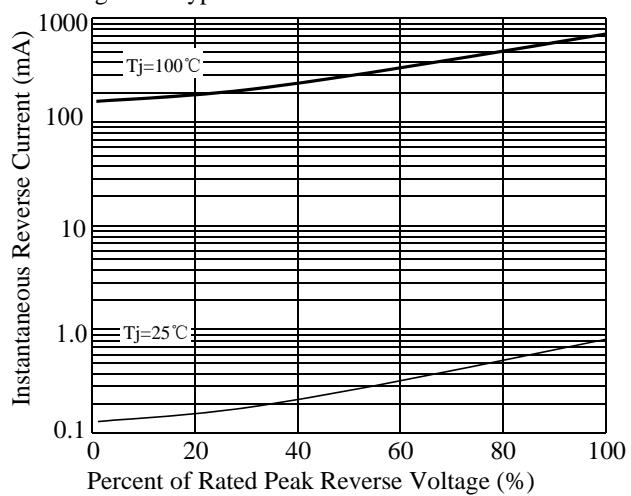


Fig 5. - typical transient thermal impedance (Note 3)


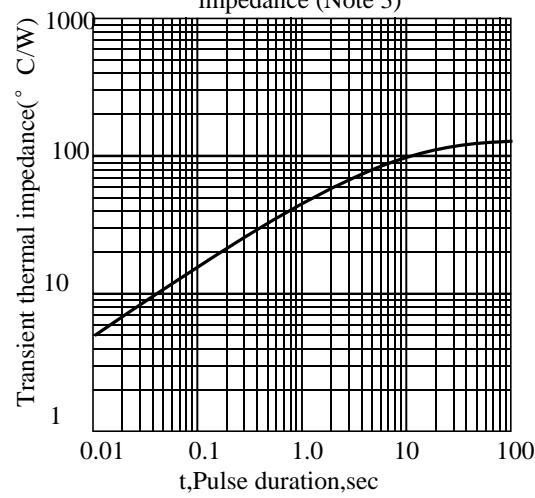



Fig 6. - Typical Junction Capacitance

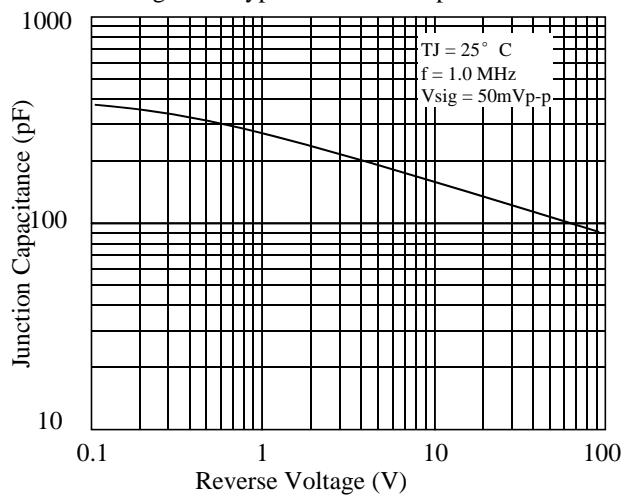

# S-SBR10100



## 3. dimension:

TO-277A

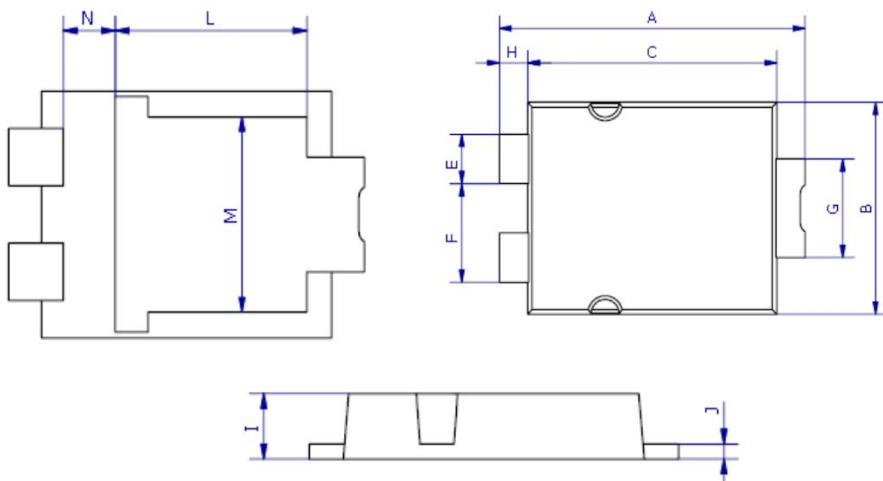

DIM	MILLIMETERS		INCHES		DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX		MIN	MAX	MIN	MAX
A	6.3	6.7	0.248	0.264	X	0.9	1.2	0.35	0.047
B	4.1	4.5	0.161	0.177	Y	1.9	2.1	0.075	0.083
C	5.1	5.5	0.201	0.217					
E	0.9	1.1	0.035	0.043					
F	1.9	2.1	0.075	0.083					
G	1.9	2.1	0.075	0.083					
H	0.50	0.70	0.020	0.028					
I	1.00	1.20	0.039	0.047					
J	0.15	0.35	0.006	0.014					
L	3.30	3.70	0.130	0.146					
M	3.20	3.60	0.126	0.142					
N	0.80	1.10	0.031	0.043					
O	0.90	1.10	0.035	0.043					
P	3.90	4.30	0.154	0.169					
Q	0.50	0.80	0.020	0.031					
R	0.85	1.15	0.033	0.045					
S	2.00	2.30	0.079	0.091					
T	2.50	2.80	0.098	0.110					

Mounting PAD layout

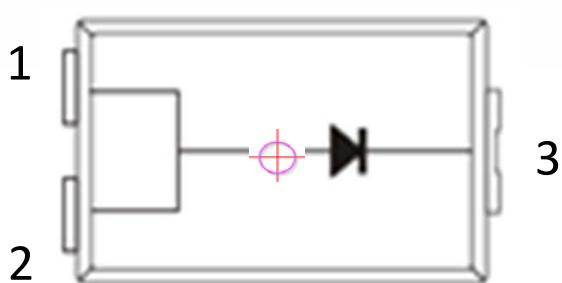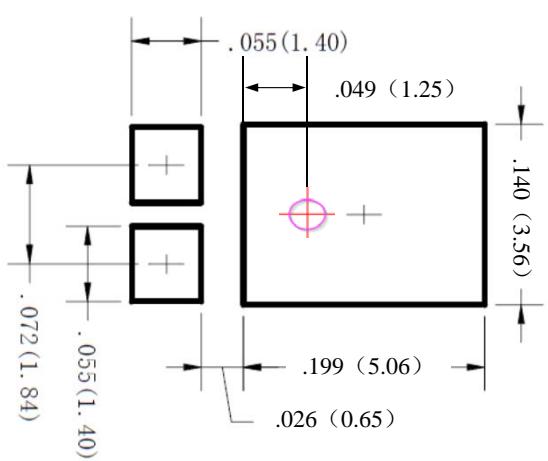

1: Anode  
 2: Anode  
 3: Cathode



乐山无线电股份有限公司  
Leshan Radio Company, Ltd

## S-SBR10100

### 4. Update Record

版次	更新记录	更新作者	更新日期
1	第一版	谭志伟	2020-11-21