

HSF

NOTES:
 Rated Current:1.0AMP
 Contact Resistance:20mΩ max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ min
 Operation Temperature:-40°C to +105°C

Contact Material:Phosphor Bronze
 Contact Plating:Au Or Tin Over Ni
 Insulator Material:PA9T+30%G.F UL94V-0

Ordering Information






2521-1 XX Z XX CUN X X

No. of Pins per Row: 02-40Pin
 Contact Plating:
 G0=Gold Flash
 G3=10μ"Gold
 G4=15μ"Gold
 G5=30μ"Gold
 SN=Tin

Packing:
 T=Tube
 R=Tape&Reel

Series No.

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

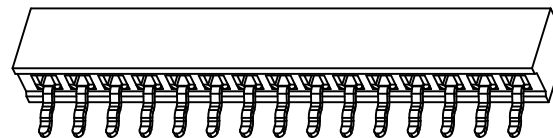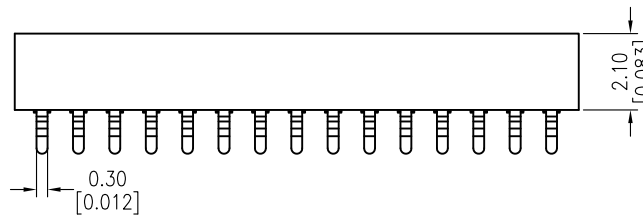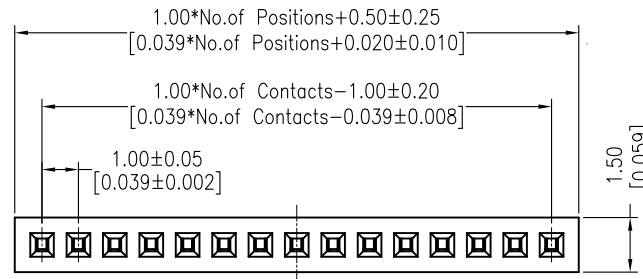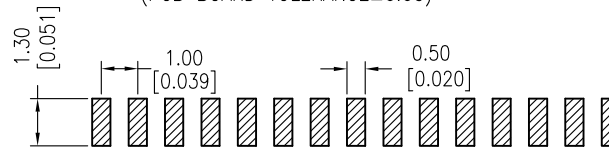

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
A0	2014/12/25	NEW	—	X.X ±0.40	Allen	2014/12/25	mm	inch	2521-1XXZXXCUNXX
				X.XX ±0.25	CHECK	DATE	A4		TITLE:
				X.XXX ±0.15	APPROVE	DATE	SHEET	1/1	1.00mm Female Header
				Angle ± 3'			PROJ	Customer NO.	Single Row 90° SMT Type
				DIM TOL					