

**SPEC. NO.:** PS-55907-XXXXX-XXX

**REVISION:** H

**PRODUCT NAME:** 0.5 mm PITCH USB TYPE C CONN.

**PRODUCT NO:** 549XX, 559XX, 579XX, 318XX, EE96X, CA8XX, 319XX Series

<b>PREPARED:</b>  <b>Peng, Wu Chuan</b>  <b>DATE:</b> <b>2020.05.22</b>	<b>CHECKED:</b>  <b>Chang, Chun Te</b>  <b>DATE:</b> <b>2020.05.22</b>	<b>APPROVED:</b>  <b>Kuo, Rong Hsun</b>  <b>DATE:</b> <b>2020.05.22</b>
--	---	--

Aces P/N: **55907 series**

**TITLE: 0.5 MM PITCH USB TYPE C CONN.**

RELEASE DATE: 2020.05.22

REVISION: H

ECN No: ECN-2005442

PAGE: **2** OF **24**

<b>1. REVISION HISTORY .....</b>	<b>3</b>
<b>2. SCOPE .....</b>	<b>4</b>
<b>3. APPLICABLE DOCUMENTS .....</b>	<b>4</b>
<b>4. REQUIREMENT .....</b>	<b>4</b>
<b>5. PERFORMANCE .....</b>	<b>5</b>
<b>6. PRIMARY QUALIFICATION APPROVAL TESTING .....</b>	<b>10</b>
<b>7. GROUP TEST METHOD .....</b>	<b>13</b>
<b>8. INFRARED REFLOW CONDITION .....</b>	<b>24</b>

Aces P/N: **55907 series**

TITLE: **0.5 MM PITCH USB TYPE C CONN.**

RELEASE DATE: 2020.05.22

REVISION: H

ECN No: ECN-2005442

PAGE: **3** OF **24**

## 1 Revision History

Rev.	ECN #	Revision Description	Prepared	Date
1	ECN-1404374	New product specification	Jerry	2015.01.09
2	ECN-1507364	USB Type C 1.1 SPEC UPDATE	Jerry	2015.07.21
3	ECN-1509145	According to USB Connector and Cable assembly Compliance Document – Revision 1.0RC update.	Ray	2015.09.15
4	ECN-1512378	Modify Mixed flowing gas test time.	Ray	2015.12.24
O	ECN-1603243	Final product specification	Jason	2016.03.17
A	ECN-1701147	Add New Part Number	Jerry	2017.03.02
B	ECN-1706342	Add 55918 Number	zhouquan	2017.06.26
C	ECN-1707210	Add 57996 Series	Liuhoa	2017.07.14
D	ECN-1711233	Add 55949,55995,55999,57988,57991,31893 Series	Jerry	2017.11.28
E	ECN-1808030	Add 57999,31831,31861,31862,31895,31896 Series	Jerry	2018.07.16
F	ECN-1907310	Add 559XX,579XX,318XX Series	Hsu,Wei Chun	2019.07.12
G	ECN-1911109	ADD EE96X,CA8XX Series	Liuhoa	2019.11.07
H	ECN2005442	ADD 319XX Series	Peng Wu Chuan	2020.05.22

Aces P/N: **55907 series**

TITLE: **0.5 MM PITCH USB TYPE C CONN.**

RELEASE DATE: 2020.05.22

REVISION: H

ECN No: ECN-2005442

PAGE: **4** OF **24**

## 2 SCOPE

This specification covers performance, tests and quality requirements for 0.5mm pitch USB Type C connector.

Aces' P/N: Receptacle : 54926, 55907, 55910, 55912, 55914, 55915, 55933, 55939, 55940  
55949, 55960, 55966, 55995, 55999, 57988, 57991, 57996, 57999  
31831, 31861, 31862, 31893, EE96H,559XX,579XX,318XX ,  
CA8XX SERIES

Plug : 55918 , 55937,55965,31896,559XX,318XX, **319XX** SERIES

## 3 APPLICABLE DOCUMENTS

Universal Serial Bus Type-C Cable and Connector Specification  
EIA-364 : ELECTRONICS INDUSTRIES ASSOCIATION

## 4 REQUIREMENTS

### 4.1 Design and Construction

Product shall be of design, construction and physical dimensions specified on applicable product drawing.

### 4.2 Materials and Finish

#### 4.2.1 Contact: High performance Copper alloy

Finish: (a) Contact Area: Refer to the drawing.

(b) Under plate: Refer to the drawing.

(c) Solder area: Refer to the drawing.

#### 4.2.2 Housing: Thermoplastic, High temp. UL94 V-0

#### 4.2.3 Shell: Stainless steel

#### 4.2.4 Plug Side Latch: Stainless steel

#### 4.2.5 Plug EMC Spring: Stainless steel or High performance Copper alloy

#### 4.2.6 Receptacle Mid-Plate: Stainless steel

#### 4.2.7 Receptacle EMC Pad: Stainless steel or High performance Copper alloy

### 4.3 Ratings

#### 4.3.1 Rated voltage: AC 20 V

#### 4.3.2 Current:

A current of 5 A shall be applied collectively to VBUS pins and 1.25 A shall be applied to the VCONN pin as applicable, terminated through the corresponding GND pins. A minimum current of 0.25 A shall also be applied individually to all the other contacts.

#### 4.3.3 Operating Temperature : -40°C to +85°C

Aces P/N: **55907 series**

TITLE: **0.5 MM PITCH USB TYPE C CONN.**

RELEASE DATE: 2020.05.22

REVISION: H

ECN No: ECN-2005442

PAGE: **5** OF **24**

## 5 Performance

### 5.1. ELECTRICAL REQUIREMENTS

<b>ELECTRICAL</b>		
<b>Item</b>	<b>Test Condition</b>	<b>Requirement</b>
<b>Low Level Contact Resistance(LLCR)</b>	EIA-364-23 The measurement is made across the plug and receptacle mated contacts and does not include any internal paddle cards or substrates of the plug or receptacle. Measure at 20 mV (Max) open circuit at 100 mA.	40 mΩ (max) initial for all pin  50 mΩ (max) after initial measurement.
<b>Insulation Resistance</b>	EIA 364-21. Mated and unmated connectors, apply 100 V DC between adjacent terminals. Applicable to both receptacle and plug.	A minimum of 100 MΩ insulation resistance
<b>Dielectric Withstanding Voltage</b>	EIA-364-20 The dielectric shall withstand 100 VAC (RMS) for one minute at sea level after the environmental stress	No disruptive discharge Current leakage: 1 mA max.
<b>Contact Current Rating</b>	Mate connector: measure the temperature rise at rated current after: A current of 5 A shall be applied collectively to VBUS pins (i.e., pins A4, A9, B4, and B9) and 1.25 A shall be applied to the VCONN pin (i.e., B5) as applicable, terminated through the corresponding GND pins (i.e., pins A1, A12, B1, and B12). A minimum current of 0.25 A shall also be applied individually to all the other contacts The ambient condition is still air at 25° C (EIA-364-70 METHOD 2)	When current is applied to the contacts, the temperature rise shall not exceed 30°C at the outside surface of the shell.

Aces P/N: **55907 series**

TITLE: **0.5 MM PITCH USB TYPE C CONN.**

RELEASE DATE: 2020.05.22

REVISION: H

ECN No: ECN-2005442

PAGE: **6** OF **24**

## 5.2 MECHANICAL REQUIREMENTS

<b>MECHANICAL</b>		
<b>Item</b>	<b>Test Condition</b>	<b>Requirement</b>
<b>Insertion Force</b>	EIA 364-13 Mate connector, At a maximum rate of 12.5 mm (0.492") per minute.	Within the range of 5 N to 20 N..
<b>Extraction Force</b>	EIA 364-13 Un-mate connector, At a maximum rate of 12.5mm (0.492") per minute.	Initial: Within the range of 8 N to 20 N.  After Test: Within the range of 6 N to 20 N
<b>Durability</b>	The durability rating shall be 10,000 cycles minimum for the USB Type-C connector family. The durability test shall be done at a rate of 500+/-50 cycles per hour and no physical damage to any part of the connector and cable assembly shall occur. (EIA-364-09)	No physical damage  Contact resistance: 50 mΩ Max. After initial measurement  Dielectric withstanding voltage: No disruptive discharge. Current leakage: 1 mA max.  Insulation Resistance: 100 MΩ min.  Extraction Force: Within the range of 6 N to 20 N
<b>Durability (preconditioning)</b>	Perform 50 unplug/plug cycles (EIA-364-09)	No physical damage
<b>Vibration</b>	EIA-364-28, test condition VII, test condition letter D, 15 minutes in each of 3 mutually perpendicular directions. Both mating halves should be rigidly fixed so as not to contribute to the relative motion of one contact against another.	No evidence of physical damage. No discontinuities of 1 μs or longer duration when mated connector during test.  Contact resistance : 50 mΩ Max
<b>4-Axis Continuity Test</b>	-The PCB shall be clamped on three sides of the receptacle no further than 5 mm away from the receptacle outline. - 5 mm ball tipped probe applied the force - Duration : 10 seconds - Direction: four directions (i.e., left, right, up, and down).	No discontinuities greater than 1 microsecond duration in any of the four orientations tested.

Aces P/N: **55907 series**

**TITLE: 0.5 MM PITCH USB TYPE C CONN.**

RELEASE DATE: 2020.05.22

REVISION: H

ECN No: ECN-2005442

PAGE: **7** OF **24**

**Wrenching Test**

- Plug only
- Direction: four directions (i.e., left, right, up, and down).
- Duration: 10 seconds

The plug shall be mated with the continuity test fixture after the test forces have been applied to verify no damage has occurred that causes discontinuity or shorting.

No plug damage: 0.75 Nm.  
No discontinuity or short after the test force applied.

Dielectric withstanding voltage:  
No disruptive discharge for 100VAC(rms)

The plug shall disengage from the test fixture or mechanically fail when a moment of 2.0 Nm is applied in the up and down directions and a moment 3.5 Nm is applied in the left and right directions.

Aces P/N: **55907 series**

TITLE: **0.5 MM PITCH USB TYPE C CONN.**

RELEASE DATE: 2020.05.22

REVISION: H

ECN No: ECN-2005442

PAGE: **8** OF **24**

### 5.3 ENVIRONMENTAL REQUIREMENTS

<b>ENVIRONMENTAL</b>		
<b>Item</b>	<b>Test Condition</b>	<b>Requirement</b>
<b>Temperature life</b>	EIA-364-17, method A 105° C without applied voltage for 120 hours.	No evidence of physical damage. Contact resistance: 50 mΩ Max.
<b>Temperature life (preconditioning)</b>	EIA-364-17, method A 105° C without applied voltage for 72 hours.	No evidence of physical damage. Contact resistance: 50 mΩ Max.
<b>Thermal shock</b>	EIA-364-32, test condition I 10 cycles with the exception of exposure times. Place a thermocouple in the center of the largest mass component of the connector that is in the center of the test chamber to insure that the contacts reach the temperature extremes before ramping to the other temperature.	No evidence of physical damage. Contact resistance: 50 mΩ Max.
<b>Mixed flowing gas</b>	EIA-364-65, class II Condition A  Mate connectors, and subject to the mixed flowing gas conditions. 1) expose 1/2 of the specimens unmated for 2/3 of the test duration 2) mate each specimen to the same plug that it was mated to during temperature life (preconditioning); and, 3) expose for the remainder of the test duration. Duration: 7 day	No evidence of physical damage. Contact resistance: 50 mΩ Max.
<b>Thermal disturbance</b>	Cycle the connector or socket between 15 °C ±3 °C and 85 °C ± 3 °C, as measured on the part. Ramps should be a minimum of 2 °C per minute, and dwell times should insure that the contacts reach the temperature extremes (a minimum of 5 minutes). Humidity is not controlled. Perform 10 such cycles.	Contact resistance: 50 mΩ Max.



Aces P/N: **55907 series**

**TITLE: 0.5 MM PITCH USB TYPE C CONN.**

RELEASE DATE: 2020.05.22

REVISION: H

ECN No: ECN-2005442

PAGE: **9** OF **24**

<b>Cyclic temperature and humidity</b>	EIA-364-31 Cycle the connector between 25 °C ±3 °C at 80 % ±3% RH and 65 °C ±3 °C at 50 % ±3% RH. Ramp times should be 0.5 hour and dwell times should be 1.0 hour. Dwell times start when the temperature and humidity have stabilized within the specified levels. Perform 24 such cycles.	No mechanical damage. Contact resistance: 50 mΩ Max.  Insulation resistance: 100 MΩ min.  Dielectric withstanding voltage: No disruptive discharge. Current leakage: 1 mA max.
<b>Reseating</b>	Manually unplug/plug the connector. Perform 3 such cycles.	No physical damage

Aces P/N: **55907 series**

**TITLE: 0.5 MM PITCH USB TYPE C CONN.**

RELEASE DATE: 2020.05.22

REVISION: H

ECN No: ECN-2005442

PAGE: **10** OF **24**

## 6 PRIMARY QUALIFICATION APPROVAL TESTING

Test Group	Title	Number of Specimens	
		Receptacle	Plug
<b>Test Group A</b>	Reliability test EIA 364-1000.01	20pcs	20pcs
<b>Test Group B-1</b>	Mechanical test	B1-3 only ,8 pcs	B1-3 only ,8 pcs
<b>Test Group B-5</b>	Critical Dimensions	3	3
<b>Test Group B-6</b>	Connector Pair Current Rating	3	3
<b>Test Group B-7</b>	Plug connector Wrenching test	N/A	B7-1 ,3 pcs B7-4 ,12 pcs

TITLE: **0.5 MM PITCH USB TYPE C CONN.**

RELEASE DATE: 2020.05.22

REVISION: H

ECN No: ECN-2005442

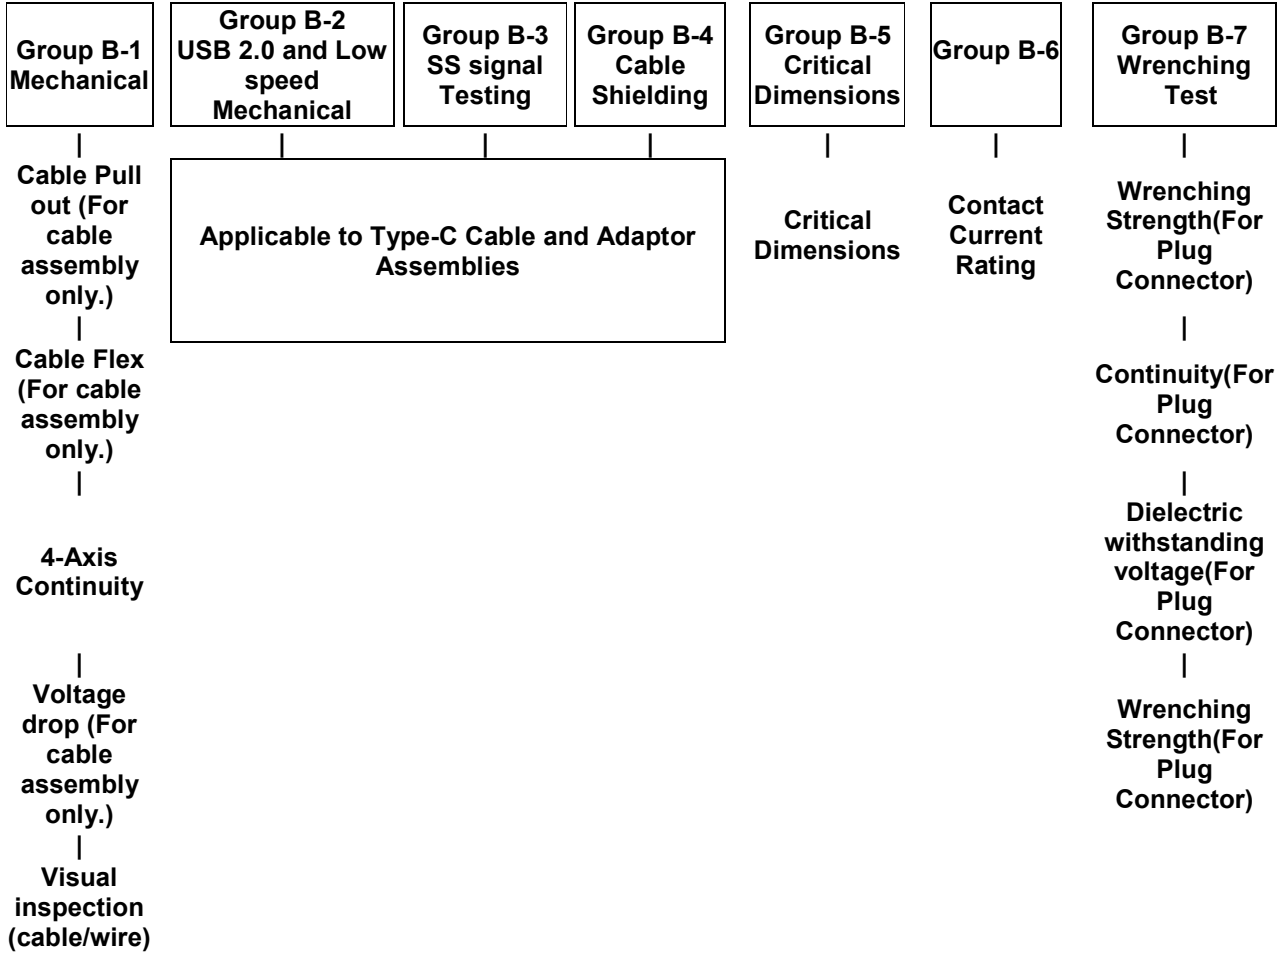
PAGE: **11** OF **24**

**6.1 Test Group A\_EIA 364-1000.1**

Group A-1 5 sample	Group A-2 5 sample	Group A-3 5 sample	Group A-4 5 sample	Group A-7 5 sample
Examination	Examination	Examination	Examination	Dielectric withstanding voltage
LLCR	LLCR	LLCR	LLCR	LLCR
Durability (50cyc)	Durability (50cyc)	Durability (50cyc)	Durability (50cyc)	Insertion Force
Temperature life (120hr)	Thermal Shock	Temp Life (72hr)	Temp Life (72hr)	Extraction Force
LLCR	LLCR	LLCR	LLCR	Durability
Reseating(3cyc)	Cyclic temperature and Humidity	Vibration	Mixed flowing gas	Extraction Force
LLCR	LLCR	LLCR	LLCR	Durability (10k)
	Reseating(3cyc)		Thermal Disturbance	Extraction Force
	LLCR		LLCR	LLCR
			Reseating(3cyc)	Dielectric withstanding voltage
			LLCR	Insulation Resistance

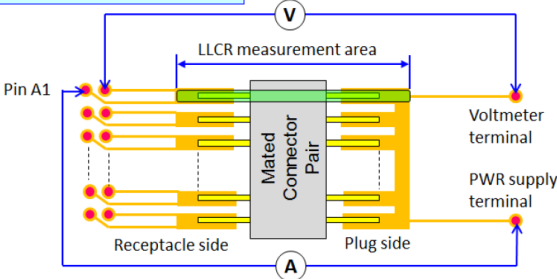
**EIA test groups A-5 and A-6 do not apply to this connector**

### 6.2 Test Group B



## 7 GROUP TEST METHOD

### Test Group A-1 (required for all connectors)

Item	Test	Test procedure	Test criteria
1	Low level contact resistance	<p>EIA-364-23 The measurement is made across the plug and receptacle mated contacts and does not include any internal paddle cards or substrates of the plug or receptacle. Measure at 20 mV (Max) open circuit at 100 mA.</p> <p>LLCR measurement of pin "A1"</p> 	40 milliohms max for all contacts. Baseline measurement.
2	Durability (preconditioning)	EIA-364-09 Perform 50 unplug/plug cycles.	No evidence of physical damage
3	Temperature life	EIA-364-17, method A 105° C without applied voltage for 120 hours.	None
4	Low level contact resistance	EIA-364-23 The measurement is made across the plug and receptacle mated contacts and does not include any internal paddle cards or substrates of the plug or receptacle.	50 milliohms max.
5	Reseating	Manually unplug/plug the connector or socket. Perform 3 such cycles.	No evidence of physical damage
6	Low level contact resistance	EIA-364-23 The measurement is made across the plug and receptacle mated contacts and does not include any internal paddle cards or substrates of the plug or receptacle.	50 milliohms max.

Aces P/N: **55907 series**

TITLE: **0.5 MM PITCH USB TYPE C CONN.**

RELEASE DATE: 2020.05.22

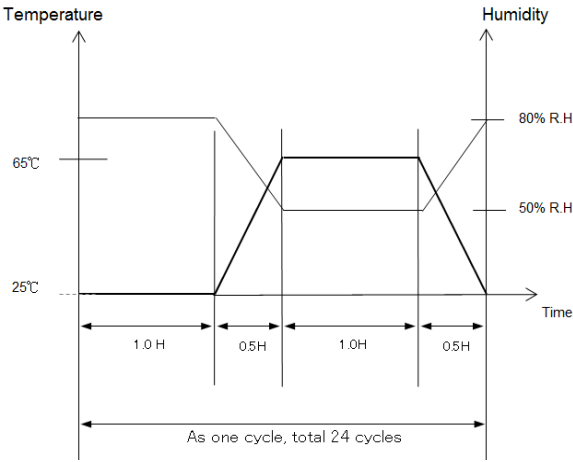
REVISION: H

ECN No: ECN-2005442

PAGE: **14** OF **24**

**Test Group A-2 (required for all connectors)**

Item	Test	Test procedure	Test criteria																								
1	Low level contact resistance	EIA-364-23 The measurement is made across the plug and receptacle mated contacts and does not include any internal paddle cards or substrates of the plug or receptacle.	40 milliohms max for all contacts. Baseline measurement.																								
2	Durability (preconditioning)	EIA-364-09 Perform 50 unplug/plug cycles.	No evidence of physical damage																								
3	Thermal shock	EIA-364-32, test condition I 10 cycles with the exception of exposure times. Place a thermocouple in the center of the largest mass component of the connector that is in the center of the test chamber to insure that the contacts reach the temperature extremes before ramping to the other temperature. <table border="1" data-bbox="539 1070 874 1503"> <thead> <tr> <th rowspan="2">Step</th> <th colspan="2">Test condition I</th> </tr> <tr> <th>Temperature, °C</th> <th>Time, minutes</th> </tr> </thead> <tbody> <tr> <td rowspan="2">1</td> <td>+0</td> <td rowspan="2">30 min</td> </tr> <tr> <td>-55</td> </tr> <tr> <td rowspan="2">2</td> <td>+10</td> <td rowspan="2">5 max</td> </tr> <tr> <td>25</td> </tr> <tr> <td rowspan="2">3</td> <td>+3</td> <td rowspan="2">30 min</td> </tr> <tr> <td>85</td> </tr> <tr> <td rowspan="2">4</td> <td>+10</td> <td rowspan="2">5 max</td> </tr> <tr> <td>25</td> </tr> <tr> <td></td> <td>-5</td> <td></td> </tr> </tbody> </table>	Step	Test condition I		Temperature, °C	Time, minutes	1	+0	30 min	-55	2	+10	5 max	25	3	+3	30 min	85	4	+10	5 max	25		-5		None
Step	Test condition I																										
	Temperature, °C	Time, minutes																									
1	+0	30 min																									
	-55																										
2	+10	5 max																									
	25																										
3	+3	30 min																									
	85																										
4	+10	5 max																									
	25																										
	-5																										
4	Low level contact resistance	EIA-364-23 The measurement is made across the plug and receptacle mated contacts and does not include any internal paddle cards or substrates of the plug or receptacle.	50 milliohms max.																								

<p><b>5</b></p>	<p><b>Cyclic temperature and humidity</b></p>	<p>EIA-364-31 Cycle the connector between 25 °C ±3 °C at 80 % ±3% RH and 65 °C ±3 °C at 50 % ±3% RH. Ramp times should be 0.5 hour and dwell times should be 1.0 hour. Dwell times start when the temperature and humidity have stabilized within the specified levels. Perform 24 such cycles.</p> 	<p>None</p>
<p><b>6</b></p>	<p><b>Low level contact resistance</b></p>	<p>EIA-364-23 The measurement is made across the plug and receptacle mated contacts and does not include any internal paddle cards or substrates of the plug or receptacle.</p>	<p>50 milliohms max.</p>
<p><b>7</b></p>	<p><b>Reseating</b></p>	<p>Manually unplug/plug the connector or socket. Perform 3 such cycles.</p>	<p>No evidence of physical damage</p>
<p><b>8</b></p>	<p><b>Low level contact resistance</b></p>	<p>EIA-364-23 The measurement is made across the plug and receptacle mated contacts and does not include any internal paddle cards or substrates of the plug or receptacle.</p>	<p>50 milliohms max.</p>

Aces P/N: **55907 series**

TITLE: **0.5 MM PITCH USB TYPE C CONN.**

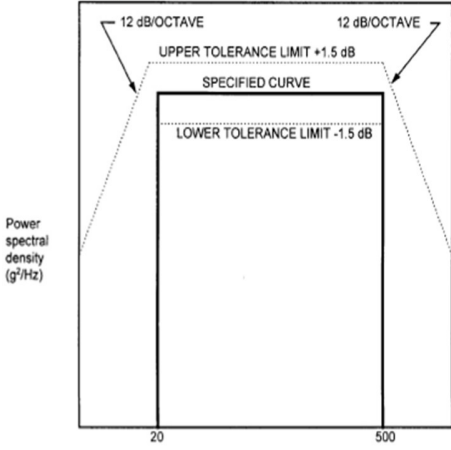
RELEASE DATE: 2020.05.22

REVISION: H

ECN No: ECN-2005442

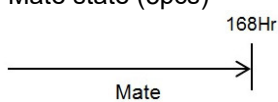
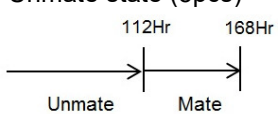
PAGE: **16** OF **24**

**Test Group A-3 (required for all connectors)**

Item	Test	Test procedure	Test criteria
1	<b>Low level contact resistance</b>	EIA-364-23 The measurement is made across the plug and receptacle mated contacts and does not include any internal paddle cards or substrates of the plug or receptacle.	40 milliohms max for all contacts. Baseline measurement.
2	<b>Durability (preconditioning)</b>	EIA-364-09 Perform 50 unplug/plug cycles.	No evidence of physical damage
3	<b>Temperature life (preconditioning)</b>	EIA-364-17, method A 105° C without applied voltage for 72 hours when used as preconditioning.	None
4	<b>Low level contact resistance</b>	EIA-364-23 The measurement is made across the plug and receptacle mated contacts and does not include any internal paddle cards or substrates of the plug or receptacle.	50 milliohms max.
5	<b>Vibration</b>	EIA-364-28, test condition VII, test condition letter D 15 minutes in each of 3 mutually perpendicular directions. Both mating halves should be rigidly fixed so as not to contribute to the relative motion of one contact against another. 	No evidence of physical damage. No discontinuities of 1 µs or longer duration when mated connector during test.
6	<b>Low level contact resistance</b>	EIA-364-23 The measurement is made across the plug and receptacle mated contacts and does not include any internal paddle cards or substrates of the plug or receptacle.	50 milliohms max.



**Test Group A-4 (required for all connectors)**

Item	Test	Test procedure	Test criteria																												
1	Low level contact resistance	EIA-364-23 The measurement is made across the plug and receptacle mated contacts and does not include any internal paddle cards or substrates of the plug or receptacle.	40 milliohms max for all contacts. Baseline measurement.																												
2	Durability (preconditioning)	EIA-364-09 Perform 50 unplug/plug cycles.	No evidence of physical damage																												
3	Temperature life (preconditioning)	EIA-364-17, method A 105° C without applied voltage for 72 hours when used as preconditioning.	None																												
4	Low level contact resistance	EIA-364-23 The measurement is made across the plug and receptacle mated contacts and does not include any internal paddle cards or substrates of the plug or receptacle.	50 milliohms max.																												
5	Mixed flowing gas	EIA-364-65, class II Condition A  -Mate state (5pcs)   -Unmate state (5pcs)   <table border="1" data-bbox="539 1438 1157 1568"> <thead> <tr> <th colspan="3">Relative</th> <th colspan="4">Rollutant</th> </tr> <tr> <th>Environmental</th> <th>Humidity</th> <th>Temperature</th> <th colspan="4">Concentration, ppb</th> </tr> <tr> <th>Class</th> <th>%</th> <th>°C</th> <th>Cl<sub>2</sub></th> <th>NO<sub>2</sub></th> <th>H<sub>2</sub>S</th> <th>SO<sub>2</sub></th> </tr> </thead> <tbody> <tr> <td>II</td> <td>70±2</td> <td>30±1</td> <td>10±3</td> <td>200±50</td> <td>10±5</td> <td>100±20</td> </tr> </tbody> </table>	Relative			Rollutant				Environmental	Humidity	Temperature	Concentration, ppb				Class	%	°C	Cl <sub>2</sub>	NO <sub>2</sub>	H <sub>2</sub> S	SO <sub>2</sub>	II	70±2	30±1	10±3	200±50	10±5	100±20	None
Relative			Rollutant																												
Environmental	Humidity	Temperature	Concentration, ppb																												
Class	%	°C	Cl <sub>2</sub>	NO <sub>2</sub>	H <sub>2</sub> S	SO <sub>2</sub>																									
II	70±2	30±1	10±3	200±50	10±5	100±20																									
6	Low level contact resistance	EIA-364-23 The measurement is made across the plug and receptacle mated contacts and does not include any internal paddle cards or substrates of the plug or receptacle.	50 milliohms max.																												

Aces P/N: **55907 series**

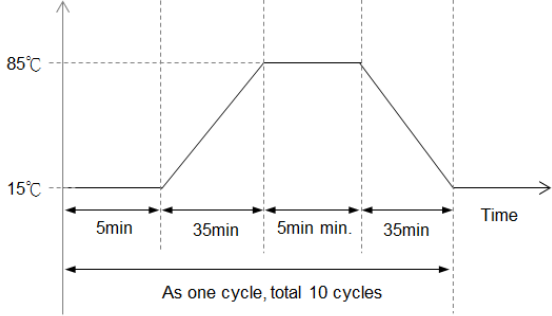
**TITLE: 0.5 MM PITCH USB TYPE C CONN.**

RELEASE DATE: 2020.05.22

REVISION: H

ECN No: ECN-2005442

PAGE: **18** OF **24**

<p><b>7</b></p>	<p><b>Thermal disturbance</b></p>	<p>Cycle the connector or socket between 15 °C ±3 °C and 85 °C ± 3 °C, as measured on the part. Ramps should be a minimum of 2 °C per minute, and dwell times should insure that the contacts reach the temperature extremes (a minimum of 5 minutes). Humidity is not controlled. Perform 10 such cycles.</p> <p>Temperature</p>  <p>As one cycle, total 10 cycles</p>	<p>None</p>
<p><b>8</b></p>	<p><b>Low level contact resistance</b></p>	<p>EIA-364-23 The measurement is made across the plug and receptacle mated contacts and does not include any internal paddle cards or substrates of the plug or receptacle.</p>	<p>50 milliohms max.</p>
<p><b>9</b></p>	<p><b>Reseating</b></p>	<p>Manually unplug/plug the connector or socket. Perform 3 such cycles.</p>	<p>No evidence of physical damage</p>
<p><b>10</b></p>	<p><b>Low level contact resistance</b></p>	<p>EIA-364-23 The measurement is made across the plug and receptacle mated contacts and does not include any internal paddle cards or substrates of the plug or receptacle.</p>	<p>50 milliohms max.</p>

Aces P/N: **55907 series**

**TITLE: 0.5 MM PITCH USB TYPE C CONN.**

RELEASE DATE: 2020.05.22

REVISION: H

ECN No: ECN-2005442

PAGE: **19** OF **24**

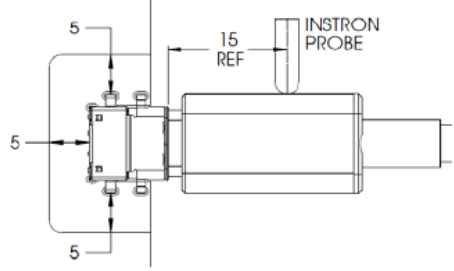
**Test Group A-7 (EIA test groups A-5 and A-6 do not apply to this connector)**

Item	Test	Test procedure	Test criteria
1	<b>Dielectric withstanding voltage</b>	EIA-364-20, 100 VAC (RMS) Perform 4 plug/unplug cycles. (Total:4 cycles)	No disruptive discharge Current leakage: 1 mA max.
2	<b>Low level contact resistance</b>	EIA-364-23 The measurement is made across the plug and receptacle mated contacts and does not include any internal paddle cards or substrates of the plug or receptacle.	40 milliohms max.
3	<b>Durability (preconditioning)</b>	EIA-364-09 Perform 4 unplug/plug cycles, followed by an unplug.	No evidence of physical damage.
4	<b>Insertion force</b>	EIA 364-13 At a maximum rate of 12.5 mm (0.492") per minute. (Total:5 cycles)	Within the range of 5 N to 20 N.
5	<b>Extraction force</b>	EIA 364-13 At a maximum rate of 12.5mm (0.492") per minute. (Total:6 cycles)	Within the range of 8 N to 20 N.
6	<b>Durability</b>	EIA 364-9 Perform 25 plug/unplug cycles. (Total:31 cycles)	No evidence of physical damage
7	<b>Extraction force</b>	EIA 364-13 At a maximum rate of 12.5mm (0.492") per minute (Total:32 cycles)	Within 8 N to 20 N.
8	<b>Durability</b>	EIA 364-9 Perform 2,468 plug/unplug cycles. (Total:2500 cycles) Rotate the receptacle or plug 180° and perform 2,500 plug/unplug cycles. Cycle rate of 500 +/-50 cycles per hour (total of 10,000 plug/unplug cycles, flipping every 2,500 cycles).	No evidence of physical damage
9	<b>Extraction force</b>	EIA 364-13 At a maximum rate of 12.5mm (0.492") per minute	Within 6 N to 20 N.
10	<b>Low level contact resistance</b>	EIA-364-23 The measurement is made across the plug and receptacle mated contacts and does not include any internal paddle cards or substrates of the plug or receptacle.	50 milliohms max.

		Aces P/N: <b>55907 series</b>	
TITLE: <b>0.5 MM PITCH USB TYPE C CONN.</b>			
RELEASE DATE: 2020.05.22	REVISION: H	ECN No: ECN-2005442	PAGE: <b>20</b> OF <b>24</b>

11	<b>Dielectric withstanding voltage</b>	EIA-364-20, 100 VAC (RMS)	No disruptive discharge. Current leakage: 1 mA max.
12	<b>Insulation Resistance</b>	EIA 364-21. Mated and unmated connectors, apply 100 V DC between adjacent terminals. Applicable to both receptacle and plug.	A minimum of 100 MΩ insulation resistance is required between adjacent contacts of unmated and mated connectors

**Test Group B-1: Type-C Connector and Cable Assembly Mechanical Tests**

Item	Test	Test procedure	Test criteria									
B1-3	<b>4-Axis Continuity</b>	<ul style="list-style-type: none"> <li>-The PCB shall be clamped on three sides of the receptacle no further than 5 mm away from the receptacle outline.</li> <li>- 5 mm ball tipped probe applied the force</li> <li>- Duration : 10 seconds</li> <li>- Direction: four directions (i.e., left, right, up, and down).</li> </ul>  <table border="1" data-bbox="510 1400 1157 1534"> <thead> <tr> <th>Receptacle configuration with respect to mounting surface</th> <th>Force at 15 mm from receptacle shell mating edge (N)</th> <th>Moment with respect to receptacle shell mating edge (Nm)</th> </tr> </thead> <tbody> <tr> <td>Right angle</td> <td>20</td> <td>0.30</td> </tr> <tr> <td>Vertical</td> <td>8</td> <td>0.12</td> </tr> </tbody> </table>	Receptacle configuration with respect to mounting surface	Force at 15 mm from receptacle shell mating edge (N)	Moment with respect to receptacle shell mating edge (Nm)	Right angle	20	0.30	Vertical	8	0.12	No discontinuities greater than 1 microsecond duration in any of the four orientations tested.
Receptacle configuration with respect to mounting surface	Force at 15 mm from receptacle shell mating edge (N)	Moment with respect to receptacle shell mating edge (Nm)										
Right angle	20	0.30										
Vertical	8	0.12										

**Test Group B-5: Critical Dimensions**

Item	Test	Test procedure	Test criteria
B5	<b>Critical Dimensions</b>	See customer drawing	

Aces P/N: **55907 series**

TITLE: **0.5 MM PITCH USB TYPE C CONN.**

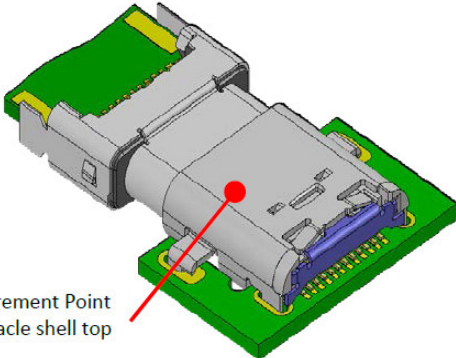
RELEASE DATE: 2020.05.22

REVISION: H

ECN No: ECN-2005442

PAGE: **21** OF **24**

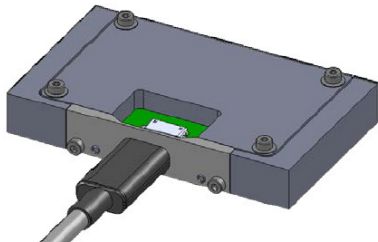
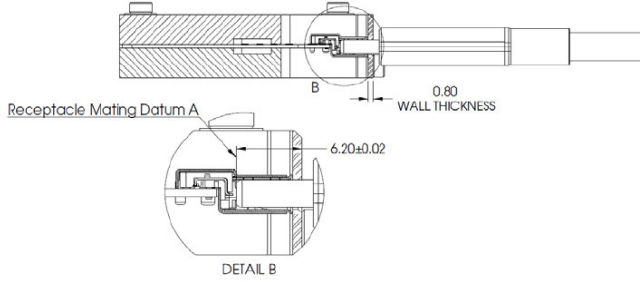
**Test Group B-6: Connector Pair Current Rating**

Item	Test	Test procedure	Test criteria
B6	Contact Current Rating	<p>Mate connector: measure the temperature rise at rated current after:            A current of 5 A shall be applied collectively to VBUS pins (i.e., pins A4, A9, B4, and B9) and 1.25 A shall be applied to the VCONN pin (i.e., B5) as applicable, terminated through the corresponding GND pins (i.e., pins A1, A12, B1, and B12). A minimum current of 0.25 A shall also be applied individually to all the other contacts            The ambient condition is still air at 25° C (EIA-364-70 METHOD 2)</p>  <p>Measurement Point Receptacle shell top</p>	<p>When current is applied to the contacts, the temperature rise shall not exceed 30°C at the outside surface of the shell. This requirement applies to the USB Type-C connector mated pair only.</p>

**Current Rating Test PCB**

Item	Trace width (mm)	Trace length (mm) on each PCB	Thickness
Signal trace	0.25 max.	13 max.	35 µm (1 oz. copper)
Ground trace	1.57 max.	38 max.	35 µm (1 oz. copper)
V <sub>BUS</sub> and V <sub>CONN</sub>	1.25 max.	30 max.	35 µm (1 oz. copper)
PCB	N/A	N/A	0.80 - 1.20 mm

**Test Group B-7: Plug Connector Wrenching Test**

Item	Test	Test procedure	Test criteria
B7-1	Wrenching Test	<ul style="list-style-type: none"> <li>- Plug only</li> <li>- Direction: four directions (i.e., left, right, up, and down).</li> <li>- Duration: 10 seconds</li> </ul> <p style="text-align: center;"><b>Wrenching Strength Test Fixture</b></p> 	<p>The plug shall be mated with the continuity test fixture after the test forces have been applied to verify no damage has occurred that causes discontinuity or shorting.</p>
B7-2	Continuity		<p>No plug damage: 0.75 Nm. No discontinuity or short after the test force applied.</p>
B7-3	Dielectric withstanding voltage	Mated, 100 VAC (RMS)	No disruptive discharge. Current leakage: 1 mA max.

Aces P/N: **55907 series**

TITLE: **0.5 MM PITCH USB TYPE C CONN.**

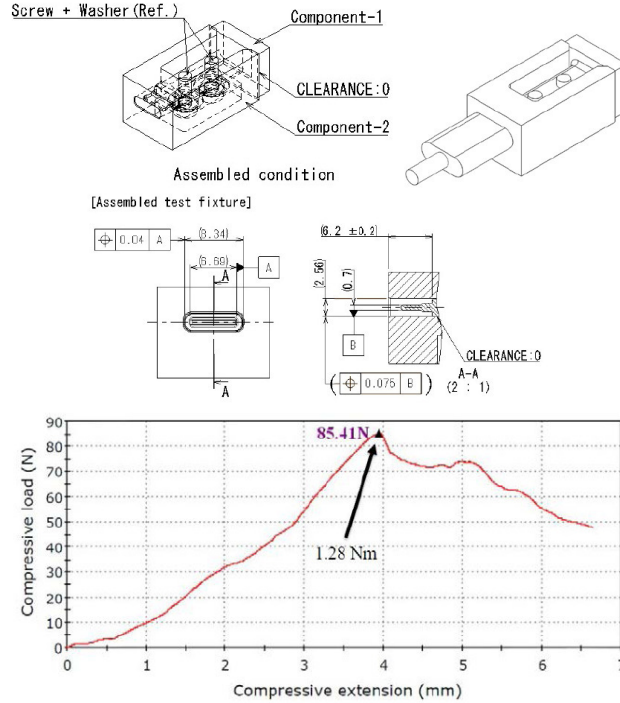
RELEASE DATE: 2020.05.22

REVISION: H

ECN No: ECN-2005442

PAGE: **23** OF **24**

**B7-4 Wrenching Test**



The plug shall disengage from the test fixture or mechanically fail when a moment of 2.0 Nm is applied in the up and down directions and a moment 3.5 Nm is applied in the left and right directions.

Example of Wrenching Strength Test Mechanical failure point

**8 INFRARED REFLOW CONDITION**

8.1. Lead-free Process

